


Digitax HD ratings

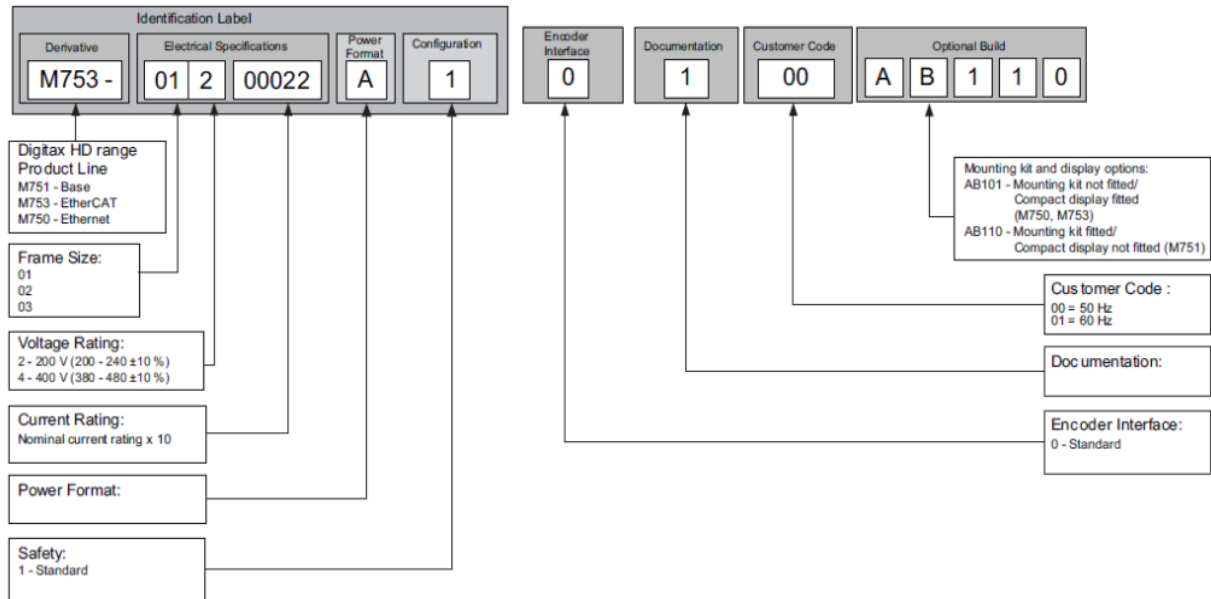

Model	No of input phases	Typical AC input current (single axis)	AC Fuse ratings (single axis)		Cable size (single axis)				Nominal current	Peak current	Typical continuous output power
					Input**		Output				
					A	IEC gG	UL Class CC, J or T*	mm ²			
01200022	1	3.7	8	15	0.75	14	0.75	24	1.1	6.6	0.3
01200040	1	6.9	12	15	1.5	14	0.75	22	2.2	12	0.7
01200065	1	11.4	16	15	2.5	12	0.75	20	3.5	19.5	1.1
02200090	1	17.7	25	25	4	10	0.75	16	5.6	27	1.8
02200120	1	23	32	30	6	10	0.75	16	7.5	36	2.3
03200160	1	31.5	32	40	6	8	1.5	14	10.8	48	3.4
01200022	3	5.8	8	15	0.75	14	0.75	20	2.2	6.6	0.7
01200040	3	7.9	12	15	1.5	14	0.75	18	4	12	1.3
01200065	3	10.5	16	15	2.5	14	0.75	16	6.5	19.5	2
02200090	3	16.7	25	25	4	10	1	14	9	27	2.7
02200120	3	20.3	32	30	6	10	1.5	12	12	36	3.7
03200160	3	27.9	32	40	6	8	2.5	12	16	48	5
01400015	3	3.1	6	15	0.75	14	0.75	20	1.5	4.5	0.8
01400030	3	4.8	8	15	0.75	14	0.75	20	3	9	1.6
01400042	3	5.3	8	15	0.75	14	0.75	18	4.2	12.6	1.9
02400060	3	10.1	16	25	2.5	14	0.75	16	6	18	3.1
02400080	3	12.1	16	25	2.5	12	0.75	14	8	24	4.2
02400105	3	14.9	20	25	4	12	1.5	14	10.5	31.5	3.6
03400135	3	20.8	32	30	6	10	2.5	12	13.5	40.5	6.9
03400160	3	22	32	30	6	10	2.5	12	16	48	7.6